


**20' x 8' x 8' ISO CONTAINER, WITH DOORS ON ONE END (TYPE 1)**  
 PART NUMBER: NGCS2011S / NSN 8150-01-528-7562 (NON-CARC)  
 PART NUMBER: NGCS2011C / NSN 8150-01-527-2880 (CARC)

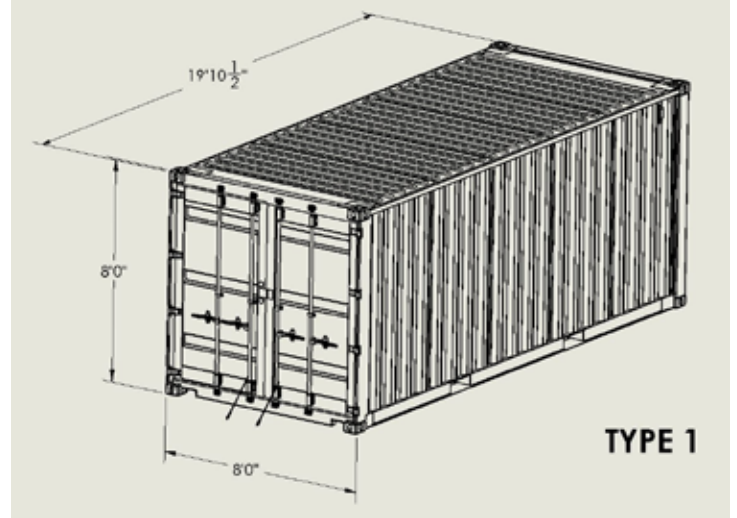

**MADE IN THE USA – ISO 9001 CERTIFIED QUALITY SYSTEM**

**FEATURES**

- 14 gauge (2 mm) corrugated CORTEN steel side walls, roof, and doors
- Double swing doors on one end with locking rods
- One set of forklift pockets for both unloaded and loaded container
- 1-1/8" marine grade plywood floor rated for 16,000 lbs. forklift traffic
- 20 lashing rings rated at 4,000 lbs. (tested at 6,000 lb.) along sidewall top and bottom rails
- 5 shoring slots on each door corner post to accommodate 2" x 6" lumber shoring system
- Self-draining roof; 2 vents; 2 document holders (optional)
- Color: Exterior Tan (33446) or Green (34094); Interior Light Grey
- Certified to CSC and latest ISO standards; Compliant to DoD ATPD 2339 specification

**SPECIFICATIONS**

EXTERNAL			INTERNAL			DOOR OPENING	
Length	Width	Height	Length	Width	Height	Width	Height
6058 mm	2438 mm	2438 mm	5898 mm	2352 mm	2240 mm	2340 mm	2134 mm
19' 10 1/2"	8' 0"	8' 0"	19' 4 13/64"	7' 8 19/32"	7' 4 3/16"	7' 8 1/8"	7' 0"

INTERNAL VOLUME (CUBIC CAPACITY)	MAX GROSS WEIGHT	TARE WEIGHT	MAX PAYLOAD	ALLOWABLE STACKING LOAD @1.8g	FLOOR STRENGTH
31.1 m <sup>3</sup>	30,480 kg	2,160 kg	28,320 kg	213,360 kg	7,260 kg
1,097 ft <sup>3</sup>	67,200 lb	4,760 lb	62,440 lb	470,380 lb	16,000 lb

WEIGHTS AND DIMENSIONS ARE NOMINAL AND MAY HAVE SMALL VARIATIONS DURING MANUFACTURING