


20' x 8' x 8'6" ISO CONTAINER, WITH DOORS ON ONE END AND DOORS CENTERED ON THE CURBSIDE WALL (TYPE 4)

PART NUMBER: NGCS 2018S / NSN 8150-01-528-7575 (NON-CARC)

PART NUMBER: NGCS 2018C / NSN 8150-01-527-2876 (CARC)

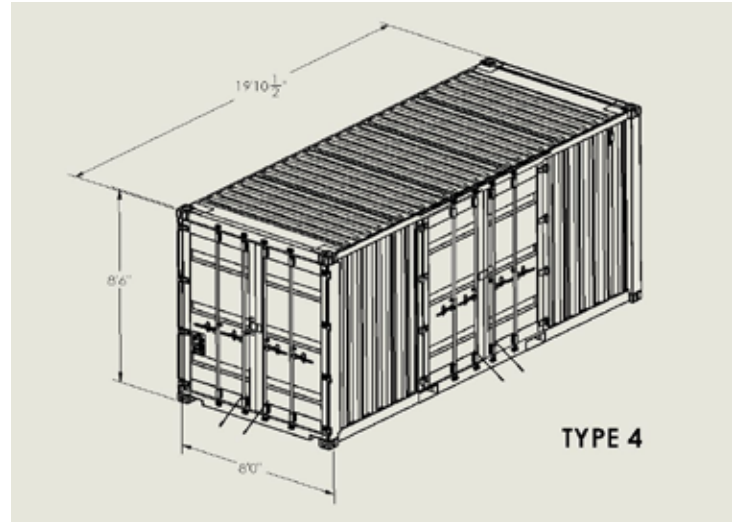

MADE IN THE USA – ISO 9001 CERTIFIED QUALITY SYSTEM

FEATURES

- 14 gauge (2 mm) corrugated CORTEN steel side walls, roof, and doors
- Double swing doors on one end and centered on curbside wall with locking rods
- One set of forklift pockets for both unloaded and loaded container
- 1-1/8" marine grade plywood floor rated for 16,000 lbs. forklift traffic
- 18 lashing rings rated at 4,000 lbs. (tested at 6,000 lb.) along sidewall top and bottom rails
- 5 shoring slots on each end door corner post to accommodate 2" x 6" lumber shoring system
- Self-draining roof; 2 vents; 2 document holders (optional)
- Color: Exterior Tan (33446) or Green (34094); Interior Light Grey
- Certified to CSC and latest ISO standards; Compliant to DoD ATPD 2339 specification

SPECIFICATIONS

EXTERNAL			INTERNAL			DOOR OPENING (REAR)		DOOR OPENING (SIDE)	
Length	Width	Height	Length	Width	Height	Width	Height	Width	Height
6058 mm	2438 mm	2591 mm	5898 mm	2288 mm	2393 mm	2338 mm	2280 mm	2338 mm	2288 mm
19' 10 1/2"	8' 0"	8' 6"	19' 4 13/64"	7' 6 5/64"	7' 9 5/16"	7' 8 3/64"	7' 5 49/64"	7' 8 3/64"	7' 6 5/64"

INTERNAL VOLUME (CUBIC CAPACITY)	MAX GROSS WEIGHT	TARE WEIGHT	MAX PAYLOAD	ALLOWABLE STACKING LOAD @1.8g	FLOOR STRENGTH
32.3 m ³	30,480 kg	2,420 kg	28,060 kg	213,360 kg	7,260 kg
1,140 ft ³	67,200 lb	5,335 lb	61,865 lb	470,380 lb	16,000 lb

WEIGHTS AND DIMENSIONS ARE NOMINAL AND MAY HAVE SMALL VARIATIONS DURING MANUFACTURING